

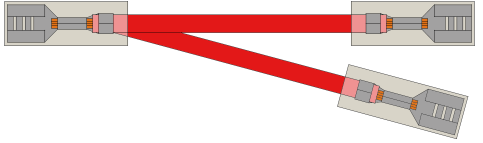


Processing:

Cutting	
Stripping	
Partial stripping	
Crimping	
Seal insertion	
Doubling unit	
Sleeve insertion	
Twisting and tinning	
Inkjet printing	
Hot printing	
Split cycle for close barrel	
Intermediate stripping	

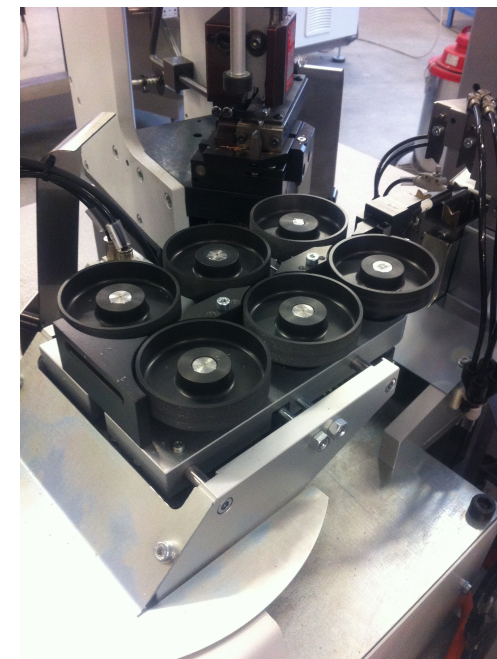

Quattro is the ultimate expression of technology combined with Italian design. It is proposed as automatic stripping and crimping size that can be fitted up to five stations. Equipped with the most advanced mechanical and electronic technologies already widely tested by the largest AM500, introduces a system power cable for the machining of very small sections.

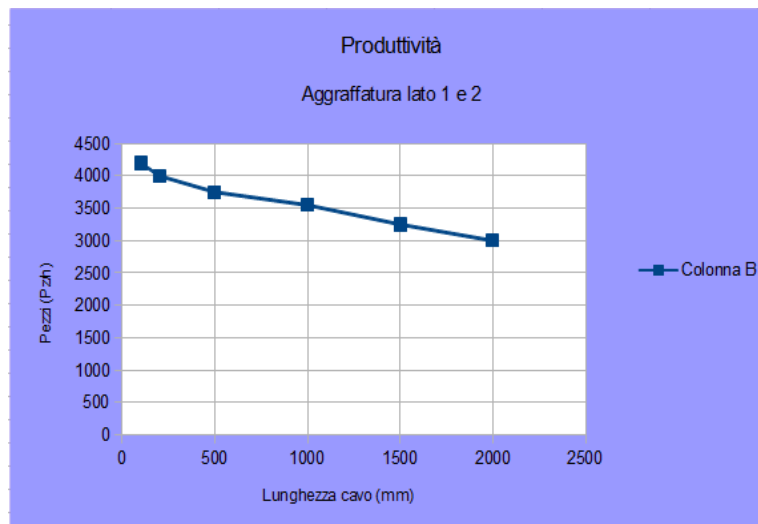

Dati tecnici:

Sezione cavo: 013 – 4mmq (6mmq optional)
 Lunghezza cavo min: 42mm aggraffatura da u solo lato
 55mm aggraffatura da entrambi i lati
 30mm (optional)
 Lunghezza spelatura: 0,1 – 15mm lato 1
 0,1 – 30mm lato 1 (optional)
 0,1 – 15mm lato 2
 0,1 – 30mm lato 2 (optional)
 Velocità alimentazione cavo: 8m/s
 Connessione elettrica: 400V 50/60Hz 5kVA
 Pressione pneumatica: 6-7bar
 Peso: 1100Kg
 Rumorosità: 75dB
 Dimensioni: L3000 x L1400 x H2000 mm

Feeder in the advanced position close to the cutting head, for the processing of very small section of cable. It can be powered that both roller belt

